

# EHC™ Group II/II+ Base Stocks

EHC base stocks comprise a global Group II slate as defined within API/ATIEL guidelines for formulation and qualification of automotive lubricants. With base oil interchange and viscosity grade read-across capabilities, EHC base stocks offer broad coverage that enables supply chain flexibility and simplified qualification testing requirements. EHC base stocks may also be used in industrial and marine applications where formulations benefit from increased oxidation stability and higher viscosity index (VI). Our rigorous processes ensure reliable delivery of consistent quality base stocks.

## Key benefits

Consistent quality to help formulators produce high-performance blends that:




Meet or exceed  
industry  
requirements



Achieve exceptional  
oxidation stability



Meet or exceed  
engine oil quality  
requirements

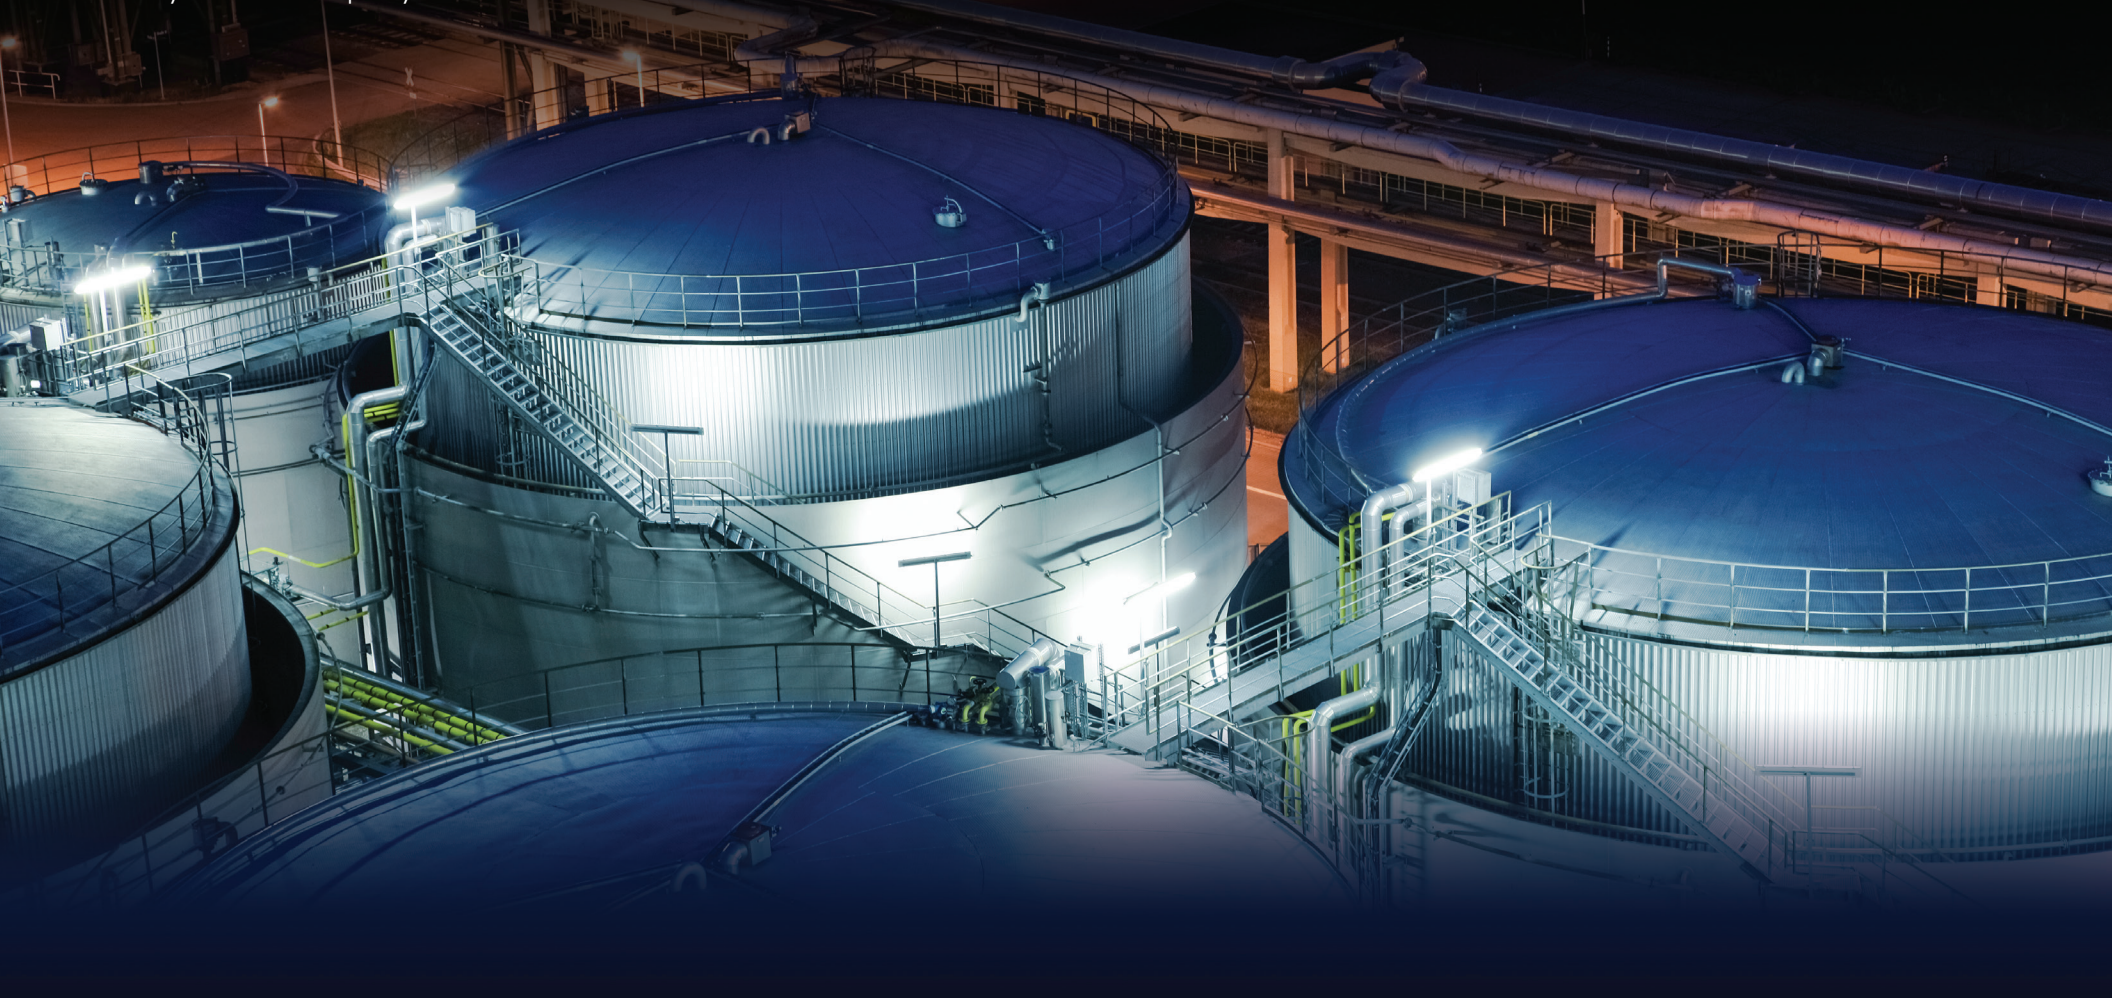

# EHC™ Base Stocks Slate expanded

Sales specification								
Property	Limits	Standard method (a)	EHC™ 45	EHC™ 50	EHC™ 65	EHC™ 110	EHC™ 120	EHC 340 MAX™
Appearance		Visual	Clear and bright	Clear and bright	Clear and bright	Clear and bright	Clear and bright	Clear and bright
ASTM color	Max	ASTM D1500	L0.5	0.5	L0.5	0.5	0.5	L1.5
CCS viscosity -25°C mPa•sec	Max	ASTM D5293	1,550					
CCS viscosity -20°C mPa•sec	Max	ASTM D5293		1,500	3,100			
Flash point, COC Deg C	Min	ASTM D92	204	210	214	230	255	294
Kinematic viscosity @ 100°C mm2/sec	Min-Max	ASTM D445	4.4-4.7	5.2-5.6	6.3-6.6	10.0-12.0	11.7-12.5	32.5-35.5
Kinematic viscosity @ 40°C mm2/sec	Min-Max	ASTM D445					96-108	460-520
NOACK Volatility, Procedure B, mass%	Max	ASTM D5800	14.5	13.5	10			
Pour point, Deg C	Max	ASTM D97	-18	-18	-18	-15	-15	-15
Viscosity index	Min-Max	ASTM D2270	113-119	110-119	103-119	95-110	102-115	95-115
Saturates, wt%	Min	ASTM 7419						98
Availability								
Americas			*		*		*	**
Europe, Africa, Middle East				*			*	**
Asia/Pacific				*		*	**	**

\* available now, \*\* Coming 2025

(a) In lieu of standard test method, alternate test methods may be used for the certification of a product property.

Note 1: Products are certified on release to meet the values specified. Actual values may deviate within the established reproducibility of the test method specified.

Note 2: For purpose of determining conformance with specification, observed or calculated values shall be rounded off to the nearest unit in the last significant digit used in expressing the limiting value in accordance to the ASTM E29 method.

## Health and Safety

Detailed health and safety information for this product is provided in the material safety data sheet (MSDS), available upon request through your local sales representative or from [www.ExxonMobil.com](http://www.ExxonMobil.com).

1-2024

All products may not be available in all countries. Every care has been taken in the preparation of this information. Typical values

may vary within modest ranges, and specifications may be subject to change. To the extent permitted by applicable law, all warranties and/or representations, express or implied, as to the accuracy of the information are disclaimed, and no liability is accepted for the accuracy or completeness of the same.

ExxonMobil is comprised of numerous affiliates and subsidiaries, many with names which include Esso, Mobil, Exxon, or ExxonMobil. For convenience and simplicity, the term ExxonMobil may be used to represent all of these entities, and the products and services provided by those entities. Nothing in this brochure is intended to override or supersede the corporate separateness of local entities.

Responsibility for local action and accountability remains with local ExxonMobil-affiliated entities.

© 2024 ExxonMobil. All trademarks used herein are trademarks or registered trademarks of Exxon Mobil Corporation or one of its subsidiaries.